



FlexScan® EV2460

23.8" (60.5 cm) LCD Monitor



Small Footprint, Large Work Space

High Resolution in a Space-Saving Design

The EV2460 uses a 23.8-inch IPS panel with full HD (1920 x 1080) resolution. The small-footprint monitor has a width of just 537.8 mm for saving desk space. Furthermore, 140 mm height adjustment allows you to easily place a laptop under the monitor to realize a convenient dual-screen environment.

Low Impact on the Environment

The EV2460 implements EIZO's proprietary EcoView technologies, which cut power consumption by as much as 40% compared to displaying at maximum brightness and help to eliminate eyestrain when viewing the monitor for long periods.

- Adjusts screen brightness according to ambient lighting
- Adjusts backlight brightness and gain when displaying dark content

As part of its efforts to maintain environmentally responsible manufacturing, EIZO developed the monitor without flame retardant in the plastic body to improve recyclability and uses recyclable packing for the boxes the monitor is shipped in.

Rest Assured with Major Sustainability Standards

The monitor is certified by major comprehensive sustainability standards such as TCO Certified Generation 8, EPEAT, and EnergyStar. Organizations concerned with ESG investments or SDGs can assuredly procure the monitor to meet required guidelines.



FlexScan® EV2460

Refreshing White with Frameless Design

The EV2460 comes with a white cabinet option with matching cables. Compared to black, white monitors offer a refreshing change that brightens the office with style. The frameless design further sophisticates the look.




The Perfect Position

The stand features wide range height adjustment, tilt, and swivel, while saving space and remaining stylish. You can adjust your monitor to the perfect position with ease.



Take Your Settings with You

EIZO's Screen InStyle proprietary software's Color Briefcase allows you to effortlessly maintain your individual screen preferences and take them with you, even to different monitors. Your settings are automatically reflected simply by connecting your laptop to a monitor supported by Screen InStyle. This is useful in environments with hot-desking or shared workspaces, providing enhanced comfort and work efficiency.

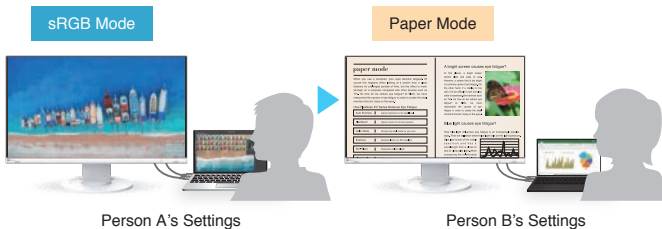

Say Goodbye to Tired Eyes


The EV2460 is equipped with functions to prevent eye fatigue even over long periods of use. With reduced eye fatigue, concentration increases, leading to improved productivity.

- Auto brightness control
- 80% blue light reduction
- Anti-glare screen
- Flicker-free screen



Free Up Your Workspace with a Stand Bracket

The PCSK-03R is an optional VESA-compliant bracket for easily mounting a mini PC to the back of the monitor's stand to save work space on your desk.

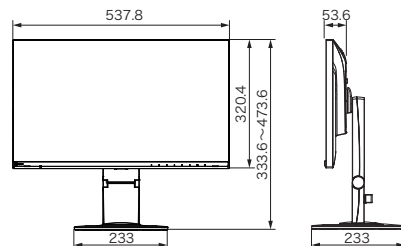

Specifications

| | | | |
|--|---|---|-------------------------|
| Model Variations | with Stand | black / white | EV2460-BK / EV2460-WT |
| | without stand | black / white | EV2460-FBK / EV2460-FWT |
| Panel | Type / Backlight | IPS / LED | |
| | Size | 23.8" / 60.5 cm | |
| | Native Resolution | 1920 x 1080 (16: 9 aspect ratio) | |
| | Viewable Image Size (H x V) | 527 x 296.5 mm | |
| | Pixel Pitch / Pixel Density | 0.275 x 0.275 mm / 93 ppi | |
| | Display Colors | 16.77 million | |
| | Viewing Angles (H / V, typical) | 178° / 178° | |
| | Brightness (typical) | 250 cd/m ² | |
| | Contrast Ratio (typical) | 1000:1 | |
| | Response Time (typical) | 5 ms (gray-to-gray) | |
| Video Signals | Input Terminals | DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), DVI-D (HDCP 1.4), D-Sub mini 15 pin | |
| | Digital Scanning Frequency (H / V) | DisplayPort: 31 - 68 kHz / 59 - 61 Hz HDMI: 15 - 68 kHz / 49 - 51, 59 - 61 Hz DVI: 31 - 68 kHz / 59 - 61 Hz | |
| | Analog Scanning Frequency (H / V) | 31 - 68 kHz / 59 - 61 Hz | |
| | Sync Formats | Separate | |
| USB | Upstream | USB 3.1 Gen 1: Type-B | |
| | Downstream | USB 3.1 Gen 1: Type-A x 4 | |
| Audio | Speakers | 1.0 W + 1.0 W | |
| | Input Terminals | Stereo mini jack, DisplayPort, HDMI | |
| | Output Terminals | Headphones (Stereo mini jack) | |
| Power | Power Requirements | AC 100 - 240 V, 50 / 60 Hz | |
| | Typical Power Consumption | 10 W | |
| | Maximum Power Consumption | 50 W | |
| | Power Save Mode | 0.5 W or less | |
| Features & Functions | Preset Modes | Color mode (User1, User2, sRGB, Paper, Movie, DICOM) | |
| | Auto EcoView | Yes | |
| | OSD Languages | English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish | |
| Physical Specifications | Dimensions (Landscape, W x H x D) | 537.8 x 333.6 - 473.6 x 233 mm | |
| | Dimensions (Portrait, W x H x D) | 320.4 x 550.3 - 588.9 x 233 mm | |
| | Dimensions (Without Stand, W x H x D) | 537.8 x 320.4 x 53.6 mm | |
| | Net Weight | 5.9 kg / 3.8 kg (Without Stand) | |
| | Height Adjustment Range | 140 mm | |
| | Tilt / Swivel / Pivot | 35° Up, 5° Down / 344° / 90° (both clockwise and counter clockwise) | |
| | Hole Spacing (VESA Standard) | 100 x 100 mm | |
| Environmental Requirements | Operating Temperature | 5 - 35 °C | |
| | Operating Humidity (R.H., non condensing) | 20 - 80 % | |
| Certifications & Standards (Please contact EIZO for the latest information.) | TCO Certified Generation 8, EPEAT 2018 (US), TÜV/ Ergonomics, TÜV/Low blue light content, TÜV/Flicker Free, TÜV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC | | |
| Dedicated Software | Monitor Control Utility | Screen InStyle Supported | |
| Supplied Accessories (May vary by country. Please contact EIZO for details.) | Signal Cables | DisplayPort (2 m) | |
| | Others | AC power cord (2 m), USB cable (2 m), Screw for VESA mount x4, setup guide | |
| Warranty | Five Years * | | |

*Usage time is limited to 30,000 hours. Free from bright sub-pixels for 6 months from the date of purchase. With current LCD technology, a panel may contain a limited number of missing or flickering pixels. If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximize the life of the monitor, we recommend the monitor be turned off periodically.

Dimensions (Unit : mm)

UniKomp.pl

Nowe Technologie IT

ul. Dworcowa 8
43-200 Psczyna
sklep@unikomp.pl
www.wyswietlanie.pl

Telefony
(32) 210 22 11
(32) 326 33 00
(32) 212 88 22

All product names are trademarks or registered trademarks of their respective companies. EIZO, the EIZO logo, and FlexScan are registered trademarks of EIZO Corporation in Japan and other countries. Screen InStyle is a trademark of EIZO Corporation. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries. DICOM is the registered trademark of the National Electrical Manufacturers Association for its standards publications relating to digital communications of medical information. VESA is a registered trademark of Video Electronics Standards Association. ENERGY STAR is a registered trademark of the United States Environmental Protection Agency in the United States and other countries. Some screen images are used with permission from Microsoft. Specifications are subject to change without notice.