


Key Features

- Effortless collaboration and multitasking on the 110" screen with floating windows
- Intuitive launcher with NFC card, myViewBoard, and SSO options for swift access to personalized settings
- Powerful productivity with Android 13 OS and Octa-core processor
- Triple USB-C ports enable seamless device integration with up to 100W charging
- Enriched educational experiences through integrated ViewSonic Software



Product Description

Tailored for educators and presenters, the ViewBoard® IFP110 boasts an expansive 110" screen, delivering a captivating experience for large-scale presentations. Its intuitive launcher ensures seamless navigation, complemented by Google, Microsoft, Apple, and NFC card single-service sign-in options for both convenience and security. Facilitating efficient presentations and collaboration, it features an integrated 8-array microphone that enhances audio quality, along with features like wireless casting and the USB-C one-cable solution that streamlines connectivity. Fully integrated with ViewSonic software, the IFP110 offers a comprehensive solution perfectly suited for the dynamic needs of in-person or hybrid scenarios.

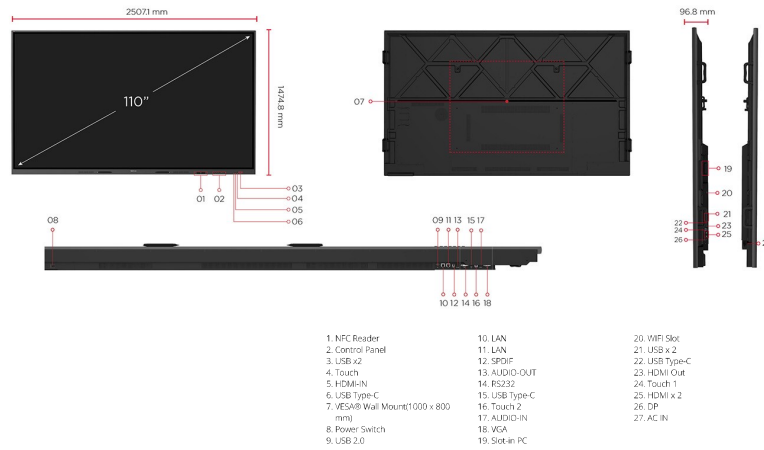

Visit Us www.viewsonic.com



DISPLAY		USB		REGULATIONS	
Panel Size:	110"	Type A:	USB2.0 x 1 (Rear x 1) (for FW upgrade)	US NRTL w/ CA,FCC/ICES003, DOE Energy Star,DOE EPEAT, CE EMC, LVD or CB, RoHS Green BOM & RoHS DoC, ErP, REACH SVHC List & DoC, EEL, WEEE,GOST-R / EAC, FF,LBL,ErP-Eco,SCIP,Annex I,Annex II,TPCH DoC,Packing waste,CA65 DoC	
Panel Type:	TFT LCD module with DLED backlight	Type B:	USB3.0 x 4 (Rear x 2 + Front x 2)		
Display Area (mm):	2436.48 (H) × 1370.52 (V)	Type C:	3 (Rear x 2: 1x (PD100W + DP1.2 + Touch + USB 3.0 & USB 2.0 ; 1x(USB 3.0 only) ; Front x 1(PD65W + DP1.2 + Touch + 100M sharing, USB 3.0 & USB 2.0))		
Aspect Ratio:	16:9	SPEAKERS		PACKAGE CONTENTS	
Resolution:	UHD 3840x2160(Pixels)	15W x 2 + 20W x 1 subwoofer		1. Remote Control with batteries	
Colors:	1.07G colors	MICROPHONE		2. Quick Start Guide	
Brightness:	400 nits (typ.)	8-array Microphone		3. Power Cables (3 M)	
Contrast Ratio:	1200:1(Typ.) 5000:1(Min. with DCR enabled)	TOP CAMERA PLATE		4. HDMI cable (3 M) x 1	
Response Time:	8ms	Yes		5. USB touch cable 2.0 (3 M) x 1	
Viewing Angles:	H = 178, V = 178 (Typ.)	EMBEDDED OS		6. RS232 adapter (Female to Female)	
Backlight Life:	30,000 Hours (Min.)	Android 13		7. Touch pen (Passive pen) (VB-PEM-002 x 2)	
Surface Treatment:	Hardness: 7H, Anti-glare coating	BUNDLED SOFTWARE		8. Retractable Stylus (PNT-001-B0/R0 x 1)	
Orientation:	Landscape	Basic Annotation Software: myViewBoard		9. Clamp x 5	
PLATFORM		Pro Annotation Software: myViewBoard for Windows (Embedded in optional Windows Slot-in PC)		10. Camera plate x 1	
Processor:	Octa-Core CPU (A73*4 + A53*4)	Wireless Presentation: Display, AirSync*		11. Screws x 8 (Camera 2+2, Wall mount x4)	
RAM:	8GB LPDDR	ViewSonic Launcher: Yes		12. Compliance Statement	
Storage:	128GB eMMC	Wireless Presentation with Touch Feedback: Viewboard Cast: Yes		COMPATIBLE SLOT-IN PC	
TOUCH		SPECIAL FEATURES		VPC-A31-01, VPC3X series	
Type/ Tech:	IR Recognition	All-in-one USB port: USB 3.0 "SmartPort USB" to all channels.			
Touch Resolution:	32767 x 32767	Simple LAN sharing between IFP and slot-in device: (10/100/1000M) (USB Type-C 10/100, Android & PC 10/100/1000)			
Touch Point:	Windows: 40 Android: 20	Light Sensor: Yes			
INPUT		NFC Reader: Yes			
HDMI:	x3 (Front x 1 :HDMI 2.0; Rear x 2:HDMI 2.0 x 1, HDMI 2.1 support ARC)	POWER			
RGB / VGA:	1	Voltage: 100-240VAC +/- 10% Wide Range			
DisplayPort:	1	ERGONOMICS			
Audio:	1 (3.5mm phone jack)	Wall Mount (VESA®): 1000 x 800			
RS232:	1	OPERATING CONDITIONS			
OPS:	X1 OPS Slot	Temperature (° C): 0°C to 40°C			
WiFi:	X1 Module Slot	Humidity: 20% ~ 80% RH non-condensing			
OUTPUT		DIMENSIONS (W X H X D)			
HDMI:	1	Physical (inch / mm): 98.70 x 58.06 x 3.81 in 2507.1 x 1474.8 x 96.8 mm			
Audio:	1 (Earphone Out)	Packaging (inch / mm): 105.7 x 64.17 x 12.2 in 2685 x 1630 x 310 mm			
SPDIF:	1	WEIGHT			
LAN		Net (lb / kg): 265lb/120.2kg			
RJ45:	X2 (in x 1; out x 1)	Gross (lb / kg): 427.69lb/194kg			

Copyright © ViewSonic Corporation 2000-2025. All rights reserved.



ul. Dworcowa 8, 43-200 Pszczyna
+48 (32) 210 22 11, +48 609 610 393
sklep@unikomp.pl | www.wyswietlanie.pl