

# AVer EVC950

## Full HD 10-point MCU



### Package contents

- Main system unit (codec)
- The New eCam PTZ camera (eCam PTZ II as follows)
- EVC microphone array
- IR remote control with batteries
- Power supply
- Cables
- Warranty card
- Quick guide

### Communications

- H.323, SIP standards, SIP TLS
- 64Kbps~4Mbps
- RJ45 network LAN (10/100/1000)
- Manual bandwidth settings

### Camera

#### eCam PTZ II:

- Pan/tilt/zoom camera
- 2-megapixel CMOS sensor
- 18X total zoom (12X optical + 1.5X digital zoom)
- ±130° pan; +90°/-25° tilt
- 72° FOV (H); 43° FOV (V); 82° FOV (diagonal)

### People video resolutions

- HD1080p (1920 x 1080)
- HD720p (1280 x 720)
- 480p (848 x 480)
- 4CIF (704 x 576)
- CIF (352 x 288)
- SIF (352 x 240)
- All resolutions at 30fps

### Content video resolutions

#### VGA Supported resolutions:

- WSXGA+ (1680 x 1050)
- WXGA (1280 x 768)
- SXGA (1280 x 1024)
- XGA (1024 x 768)
- SVGA (800 x 600)
- VGA (640 x 480)

#### DVI (digital) Supported resolutions:

- 1080p (1920 x 1080)
- 720p (1280 x 720)
- D1 (720 x 480)
- SXGA (1280 x 1024)
- XGA (1024 x 768)
- SVGA (800 x 600)
- VGA (640 x 480)

#### Output resolutions:

- Up to HD1080p (1920 x 1080) at 30 fps

### Video standards

- H.264, H.264 HP, H.264 SVC, H.263+, H.263, H.261
- H.239 dual video streams
- BFCP content sharing

### Video features

- 3D Denoise

### Video inputs

- eCam PTZ II
- VGA
- DVI (HDMI)

### Video outputs

- HDMI
- VGA

### Audio standards

- G.711, G.722, G.722.1, G.728, G.722.1C

### Audio features

- Automatic gain control (AGC)
- Advanced noise reduction
- Acoustic echo cancellation (AEC)

### Audio inputs

- EVC microphone daisy chain up to 4
- DVI (HDMI)
- Line-in (3.5 mm)

### Audio outputs

- HDMI
- Line-out (3.5 mm)

### Other supported standards

- H.224, H.225, H.245, H.281, H.323 Annex Q, H.460
- SRTP

### User interface

- Multiple layout styles
- User-friendly OSD (22 supported languages: English, Traditional Chinese, Simplified Chinese, Czech, Danish, Dutch, Finnish, French, German, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese-Brazil, Romanian, Russian, Spanish, Swedish, Thai, Turkish)
- Display/edit site name

### Network

- 10/100/1000Mbps
- NAT/firewall traversal (H.460)
- High Efficiency Lost Packet Recovery (HELPeR™)
- API support via Telnet
- Wake-on-LAN (WOL) support

- IPv4 and IPv6 support
- Network test
- Quality of service (QoS)

### Security

- AES (Advanced Encryption Standard) function (128-bit)
- Password protection for system settings
- Password protection for remote system management

### Web management tool

- Remote management
- Live monitoring
- Firmware update
- Phonebook download/upload/edit
- Restore system settings
- Export call history

### Value-added features

- Meeting recording
  - In meeting and offline recording
  - Save directly to USB flash drive
  - Supports screen re-layout during playback
  - Playback and file conversion via VCPlayer software (.mov and .mp4 format)
- EZMeetup software/App
  - 30-day for free trial
  - Connect with H.264 video codec
  - Receive resolution up to full HD 1080p at 30fps
  - Transmit resolution up to full HD 1080p at 30fps
  - Compatible with EVC multipoints
  - Compatible with firmware later than v10.06
  - Support content sharing, capture and recording
- EZDraw App
  - Compatible with EVC multipoints
  - Compatible with firmware later than v10.12 (BOOM)
  - Import .JPG, .PNG, .GIF and .BMP files
  - Export .PNG files
  - A maximum of 10 devices can be connected
- Dual monitor support

- Speed dialing via hot keys (10 sets)
- Camera presets (10 positions)
- Firmware update via USB flash drive
- Screensaver and auto power off mode
- Two front USB 2.0 ports
- Network Time Protocol (NTP)
- ScreenShare
- VCLink
- SnapShot
- Group calling
- Supports SIP voice calls

### Power supply

- AC 100V~240V, 50/60Hz
- Consumption: EIAJ 12V, 4A

### Environmental Data

- Operation temperature: 0~40°C
- Operation humidity: 20%~80%
- Storage temperature: -20~60°C
- Storage humidity: 20%~80%

### Physical characteristics

- Package dimensions: 376 x 300 x 243mm
- Package weight: 6.99kg (15.41lbs)
- Main system (codec): 320 x 262.7 x 37.2mm
- eCam PTZ II: 180 x 144 x 184mm
- EVC microphone array: 131.9 x 118.6 x 25.5mm

### Optional accessories

- Additional microphone
- Camera mount
- Replacement eCam PTZ camera

### Warranty

- 3-year standard warranty\*

\*Please register online to receive free 2 year warranty extension. For detailed warranty information, please contact an AVer representative.

**UniKomp.pl**  
Nowe Technologie IT


adres	43-200 Pszczyna, ul. Piastowska 9
tel/fax	(32) 2102211, 3263300, 2128822
e-mail	sklep@unikomp.pl
internet	www.wyswietlanie.pl

eCam PTZ II



### Hardware specifications

#### Front panel

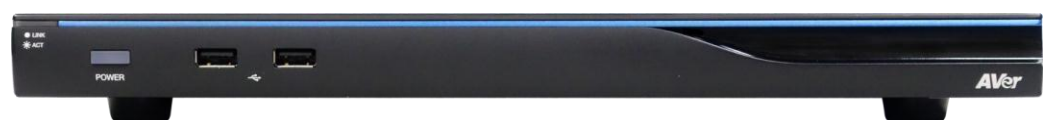

#### Back panel

