



UniKomp.pl

Nowe Technologie IT

ul. Dworcowa 8
43-200 Pszczyna
sklep@unikomp.pl
www.wyswietlanie.pl

Telefony
(32) 210 22 11
(32) 326 33 00
(32) 212 88 22



Now, find your workstyle.

Both performance and environmental consciousness are important in today's society.

FlexScan combines cutting-edge technology with sustainable design to achieve the ideal in workstyle innovation.

Whether it be in the office or at home, FlexScan enables business professionals to achieve comfort and efficiency while staying kind to the environment.

Now, find your workstyle.



FlexScan®



Open-Plan Office



Satellite Office




Telecommuting



Hybrid Work

Bask in Beauty

NEW FlexScan EV3240X / EV2740X

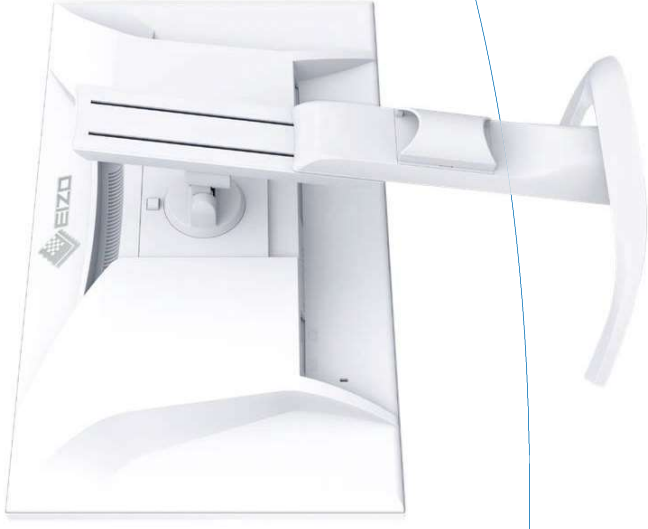

Aesthetically Pleasing Design

Bezels that are Barely There

These monitors are virtually frameless. Even with the black borders along the perimeter of the LCD there is very little distance between the display area of each screen in a multi-monitor configuration which makes for almost seamless viewing.

Color Coordination

The monitor is available in white, for a brighter office environment, or black, for a sleek and stylish mood. The cables and stand also come in matching colors for a fully coordinated look.




White



Black

Reach Your Full Potential in 4K

The EV3240X / EV2740X support 4K (3840 x 2160 pixel) resolution, displaying four times the amount of information than standard Full HD (1920 x 1080 pixel) monitors. With 4K, you can display more applications simultaneously on a single screen, greatly reducing the need to scroll or switch windows frequently.



Visualize your Workspace with AR



EV3240X



EV2740X



Streamlined Connection with USB Type-C



A Better Working Experience

USB Type-C compatible monitors make it faster and easier to connect a laptop when moving between workstations, or when working away from the office.



Before

Power Delivery

Power delivery via USB Type-C reliably charges laptops and small desktop PCs. This eliminates the need for a laptop's bulky power supply unit, freeing up desk space.

After



Connect Peripherals

Laptops often have limited connectivity options for peripherals. Connecting to a USB Type-C compatible monitor gives access to a hub with multiple USB Type-A ports for easily connecting an external keyboard, mouse, web camera, or storage device.

Compatible Models

EV3895 / EV3240X / EV2740X / EV2795 / EV2495 / EV2490 / EV2781 / EV2485 / EV2480



Visit Our Website

Infographic: "What is USB Type-C?"



Network Connection

While many modern laptops are not equipped with a dedicated LAN port, a USB Type-C compatible monitor with a built-in LAN adapter provides users with access to the network via the monitor. This allows users to conduct conference calls or data transfers reliably and at high speed.



Compatible Models

EV3895 / EV3240X / EV2740X / EV2795 / EV2495 / EV2490

Protecting Network Security in Shared Workspaces

Social change has led to a diversification of workspace models and workstyles. More companies are adopting shared office spaces, conference rooms, and meeting spaces. EIZO MAC Address Clone Utility software is available to enable the convenient use of wired LAN functions in a secure environment through MAC address authentication when using EIZO LAN port monitors in such spaces. Supports *Windows OS only*.



Daisy Chain

With a daisy chain users can connect multiple monitors via a single video signal output. Connecting monitors in a daisy chain simplifies cable management, tidying up the back of the desk for an even cleaner office aesthetic.



Before

After

Compatible Models

EV2795 / EV2495 / EV2490



Visit Our Website

What do I need to know about daisy chaining?




Say Goodbye to Tired Eyes



Glare Reduction

Anti-Glare Coating


FlexScan monitors are treated with an anti-glare coating to reduce screen reflections caused by ambient lighting. The coating scatters incoming light, reducing the amount of light reflected into your eyes.

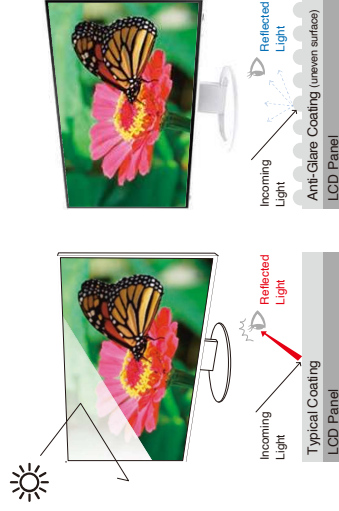

Flicker-Free Viewing

EyeCare Dimming Mode


In low brightness ranges, users may perceive flicker on a typical LED backlight, causing eye fatigue and often headaches. EyeCare is a dimming function that cuts flicker to a degree that human eyes cannot detect, reducing eye fatigue and flicker-related headaches, without affecting color stability of the monitor.



Auto Brightness Control

Always the Ideal Brightness



The Auto EcoView function automatically adjusts the brightness of your monitor according to ambient lighting. This ensures your monitor is always at the optimal brightness for reducing eye fatigue.

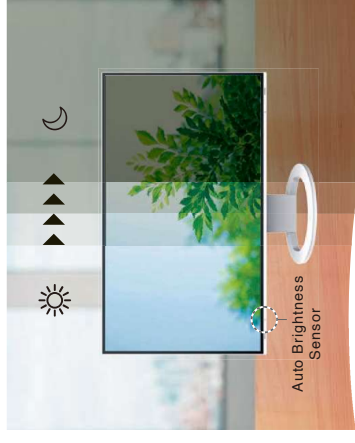

Blue Light Reduction

Paper Mode


Do you find that your screen is often too bright to read text comfortably? FlexScan monitors are equipped with Paper Mode which reduces blue light to simulate paper, making it less straining on your eyes. When used in conjunction with the Auto EcoView function, blue light is even further reduced.



Stable Image Even at Low Brightness

Reduce Brightness to Approximately 1 cd/m²

Frameless and wide monitors can be adjusted to a brightness of approximately 1 cd/m² without negatively impacting the color or stability of the screen.



Visit Our Website

"Designed to Protect Your Eyes"



The Perfect Position





Versatile Stand

The stands feature height adjustment, tilt, and swivel, while saving space and remaining stylish. Quickly and smoothly adjust your monitor to the perfect position.

The specific movement ranges of stands varies by model. See pages 20 - 23 for specifications of all monitors.

■ EV2795 / EV2781

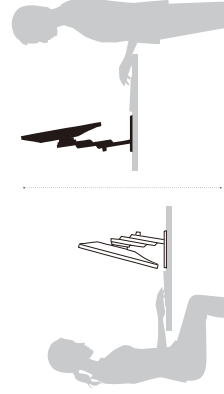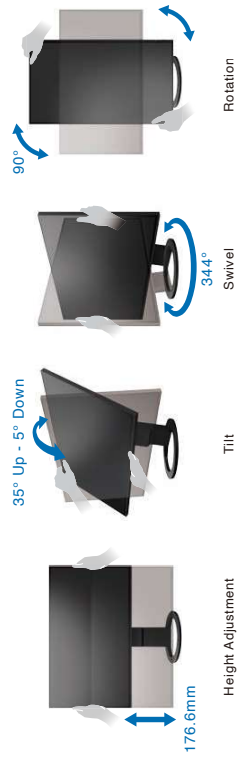


Wide Height Adjustment Range

The ergonomic stand allows you to adjust the monitor to the most comfortable position suited for the workplace or home office.

Space-Saving Positioning

For the most limited workspaces, a laptop can fit comfortably under the monitor with the stand at maximum height. This allows you to use the laptop as a second screen without taking up valuable desktop space.


The specific movement ranges of stands varies by model. See pages 20 - 23 for specifications of all monitors.

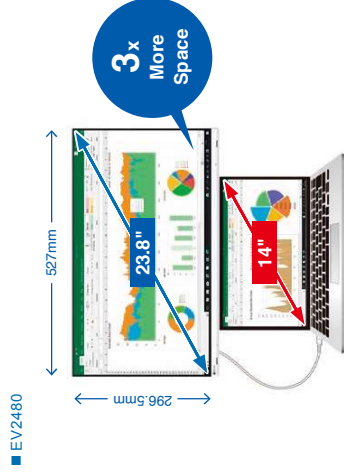

Free Up Your Workspace

VESA-compliant stand brackets let you easily mount a client terminal such as a thin client or mini PC to the back of the monitor. The space the client terminal previously occupied is now freed up so you can make better use of your desktop. Even with the client terminal attached you can adjust the monitor's stand freely.


Please check EIZO website for supported models.

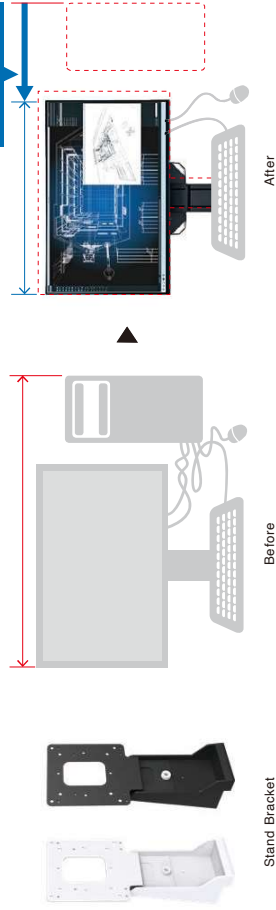

Portrait Mode

View web pages and documents easily by switching the monitor to portrait mode simply by rotating the screen.

The specific movement ranges of stands varies by model. See pages 20 - 23 for specifications of all monitors.

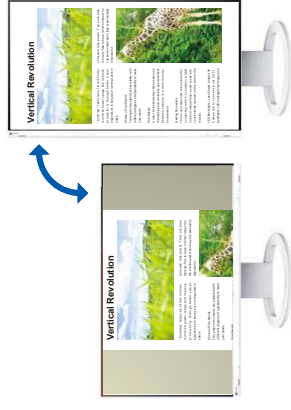


Intelligent Software to Work Better

SCREEN INSTYLE

EIZO's free Screen InStyle software automatically optimizes your monitor to make your user environment more comfortable.

See pages 20 - 23 for compatible monitors.


Compatible OS Windows 11 / 10

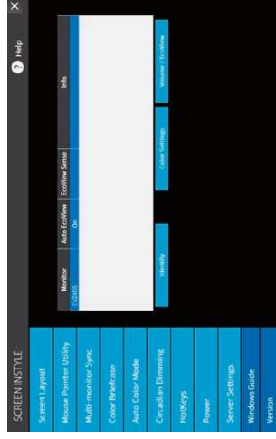

Automatically Change the Color Mode for Each Application

Auto Color Mode

FlexScan monitors have multiple color modes designed for different uses. Use the Auto Color Mode to assign a color mode to turn on when using specific applications such as those for writing documents, photo viewing, creating illustrations or watching movies. When an application is opened the screen will automatically switch to the assigned color mode, making manual switching unnecessary.



Organize Your Desktop to Increase Work Efficiency

Screen Layout


This function allows you to divide the desktop and arrange each program's window neatly across the screen to help you work smart and efficiently.



Easily Switch Between Inputs / Color Modes

Assign Hotkeys for Switching Input Signals and Color Modes


You can assign keyboard hotkeys to switch between color modes or input signals of two PCs connected to your monitor.



Multi-Monitor Convenience


Synchronize Screen Adjustments

When using multiple monitors, save time by synchronizing all the monitors with each other. If you change the color mode, brightness or color temperature of one monitor, the rest will automatically change to the same.

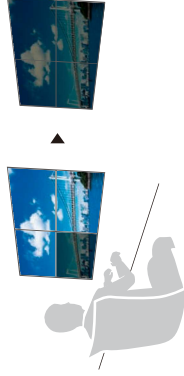

On/Off All at Once

When one monitor's power is turned off, all other monitors will also turn off. Save energy by easily turning off all monitors at once.

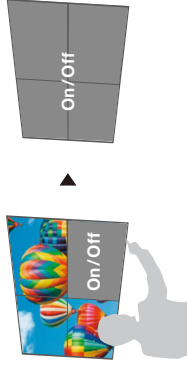


Screen InStyle Server

Effectively Monitor Asset Management

Automatically Receive Monitor or PC Information


With Screen InStyle Server receive information such as the model name and serial number of any monitor connected to your network. Additionally, see information from the computer that each monitor is connected to, such as the OS, IP address and computer name.

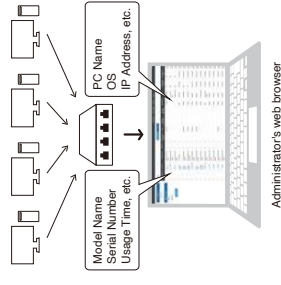

Control Settings on Multiple Monitors at Once

Manage Multiple Monitors from One Location

Control multiple monitors' settings such as color mode, brightness, and eco functions from a remote location. Furthermore, prevent unintended setting changes by locking the operation switch.



Conserve Power with Central Management

Manage various power settings of networked PCs and monitors. Set the monitor to turn off or the PC to sleep after a set period of inactivity.

Improve Security with Automatic Locking

Improve office security by setting networked PCs to automatically lock after a certain period of inactivity. This ensures the PC remains secure after the user leaves their desk.

Download Screen InStyle and Screen InStyle Server >>>



Care for the Environment

Sustainable Monitor Design

Achieving a sustainable society where we do no harm to the environment nor waste precious resources is an important initiative for businesses and communities. FlexScan Sustainable Monitors are at the forefront of EIZO's efforts to contribute to this sustainable future.

Learn more about EIZO Sustainable Monitors



Conserve to Preserve

FlexScan Sustainable Monitors include models which are made of more than 80% recycled plastic. This cuts down on the amount of plastic waste going into the environment, conserves resources, and promotes reuse of materials for preserving our natural ecosystems.

Effortlessly Save on Power Consumption

FlexScan Sustainable Monitors' Auto EcoView function automatically adjusts the screen's brightness according to changes in the ambient lighting. The EcoView Optimizer 2 function fine-tunes the balance between brightness and gain according to the content displayed on the screen. These proprietary EcoView technologies cut power consumption by as much as 50%* compared to displaying at maximum brightness.

*Typical power consumption when not using USB power delivery



Visit Our Website

"How Green is Your Monitor?" Eco Calculator



Cushioning Environmental Impact

Starting with the most recent models, FlexScan Sustainable Monitors are moving away from using plastic and styrofoam in the packaging to reduce environmental impact. The monitors are safely packed using molded pulp, which is made from recycled cardboard and newspaper, and cables are wrapped in paper instead of plastic bags.



Collective Environmental Consciousness

EIZO offers corporate customers an option for collective packaging, where multiple monitors can be packed together in a single box. We can also leave out any unneeded stands or cables. This reduces the amount of packaging materials used, improves loading efficiency, and significantly reduces unpacking and installation time, leading to less overall waste.



Certified Sustainable

EIZO complies with international laws and regulations regarding environmental protection and effective use of energy. In addition, FlexScan Sustainable Monitors meet the latest environmental standards, such as ENERGY STAR®, EPEAT, and TCO Certified Generation 9.



Our Contribution to SDGs

As part of its corporate social responsibility (CSR) activities, EIZO is contributing towards the United Nations' Sustainable Development Goals (SDGs).



SUSTAINABLE DEVELOPMENT GOALS




Built-In Color Calibration Sensors



Automatically calibrates while you work

IP Decoding Solutions

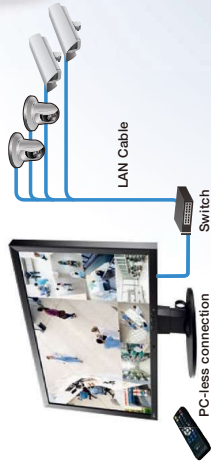


Visibility Enhancement Technology



Market-Focused Cloud Solutions



Software for Improved Workflow

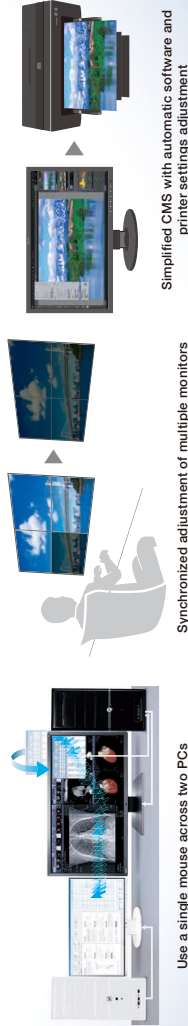


Business Enterprise

FlexScan



ColorEdge

Creative Work



Curator/RadiForce

Healthcare



DuraVision

Security & Surveillance / Maritime



Raptor/ReVue/SafeGuard

Air Traffic Control

Visual Technology Company


50+ Years of Expertise



Research and Development



Manufacturing



Quality Control



Customization



Global Reach

Extensive Market Reach

Innovative Solutions

EV2760

EV2456

EV2460

EV2360

Model Variations	With Stand	Black	Gray
Panel	EV2760-BK	EV2456-BK	EV2460-BK
Size	27.0" (68.5 cm)	24.1" (61.1 cm)	23.8" (60.5 cm)
Native Resolution	2560 x 1440 (16:9 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	1920 x 1200 (16:10 aspect ratio)
Viewable Image Size (H x V)	518.4 x 335.7 mm	518.4 x 324 mm	527.2 x 297.2 mm
Pixel Pitch / Pixel Density	0.233 x 0.233 mm / 109 ppi	0.270 x 0.270 mm / 94 ppi	0.254 x 0.254 mm / 101 ppi
Display Colors	16.77 million	16.77 million	16.77 million
Viewing Angles (H / V, typ.)	178° / 178°	178° / 178°	178° / 178°
Brightness (typ.)	350 cd/m ²	350 cd/m ²	250 cd/m ²
Contrast Ratio (Typ.)	1000:1	1000:1	1000:1
Response Time (Typ.)	5 ms (gray-to-gray)	5 ms (gray-to-gray)	5 ms (gray-to-gray)
Input Terminals	DisplayPort (HDCP 1.3), 2 x HDMI (HDCP 1.4), DVI-D (HDCP 1.4), D-Sub mini 15 pin	DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), DVI-D (HDCP 1.4), D-Sub mini 15 pin	DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), DVI-D (HDCP 1.4), D-Sub mini 15 pin
Output Terminals	DisplayPort, 31 - 68 kHz / 59 - 61 Hz	DisplayPort, 31 - 68 kHz / 59 - 61 Hz	DisplayPort, 31 - 75.5 kHz / 59 - 61 Hz
Digital Scanning Frequency (H / V)	59 - 61 Hz / 59 - 61 Hz	DVI: 31 - 76 kHz / 59 - 61 Hz	DVI: 31 - 75.5 kHz / 59 - 61 Hz
Analog Scanning Frequency (H / V)	59 - 61 Hz	31 - 68 kHz / 59 - 61 Hz	31 - 75.5 kHz / 59 - 61 Hz
USB	USB 5Gbps: Type-B USB 5Gbps: Type-A x 4	Separate USB 5Gbps: Type-B USB 5Gbps: Type-A x 4	Separate USB 5Gbps: Type-B USB 5Gbps: Type-A x 2
Audio	Headphones (Stereo mini jack)	Headphones (Stereo mini jack)	Headphones (Stereo mini jack)
Power	Power Input: AC 100 - 240 V, 50 / 60 Hz Typical Power Consumption: 67 W Maximum Power Consumption: 16 W	Power Input: AC 100 - 240 V, 50 / 60 Hz Typical Power Consumption: 67 W Maximum Power Consumption: 16 W	Power Input: AC 100 - 240 V, 50 / 60 Hz Typical Power Consumption: 67 W Maximum Power Consumption: 16 W
Features & Functions	Power Save Mode Presets Modes Automatic Brightness Control Dimensions (Landscape, W x H x D)	Power Save Mode Presets Modes Automatic Brightness Control Dimensions (Landscape, W x H x D)	Power Save Mode Presets Modes Automatic Brightness Control Dimensions (Landscape, W x H x D)
Physical Specifications	611.7 x 376.3 - 545.3 x 230 mm	531 x 351.4 - 510.1 x 190 mm	499 x 333.9 - 473.9 x 233 mm
Dimensions (Without Stand, W x H x D)	611.7 x 364.4 x 53.7 mm	531 x 341.9 x 45.5 mm	499 x 321.3 x 53.6 mm
Net Weight	8.5 kg	5.7 kg	5.5 kg
Net Weight (Without Stand)	5.7 kg	3.7 kg	3.4 kg
Height Adjustment Range	169 mm	158.6 mm	140 mm
Tilt / Swivel	35° Up, 5° Down / 344°	35° Up, 5° Down / 344°	35° Up, 5° Down / 344°
Pivot	90° (both clockwise and counter clockwise)	90° (both clockwise and counter clockwise)	90° (both clockwise and counter clockwise)
Hole Spacing (VESA Standard)	100 x 100 mm	100 x 100 mm	100 x 100 mm
Certifications & Standards	TCO Certified Generation 9, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/low blue light content, TÜV/ Flicker Free, TÜV/ Eye Care, FCC-B, CAN ICES-3 (B), TU/VAS, FCC-B, CAN ICES-3 (B), TU/VAS, PSE, VCCI-B, EPA ENERGY STAR, RoHS, WEEE, China RoHS, CCC, EAC	TCO Certified Generation 9, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/low blue light content, TÜV/ Flicker Free, TÜV/ Eye Care, FCC-B, CAN ICES-3 (B), TU/VAS, FCC-B, CAN ICES-3 (B), TU/VAS, PSE, VCCI-B, EPA ENERGY STAR, RoHS, WEEE, China RoHS, CCC, EAC	TCO Certified Generation 9, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/low blue light content, TÜV/ Flicker Free, TÜV/ Eye Care, FCC-B, CAN ICES-3 (B), TU/VAS, FCC-B, CAN ICES-3 (B), TU/VAS, PSE, VCCI-B, EPA ENERGY STAR, RoHS, WEEE, China RoHS, CCC, EAC
Dedicated Software	Supported	Supported	Supported
Supplied Accessories	DisplayPort (2 m)	DisplayPort (2 m)	DisplayPort (2 m)
Cables	AC power cord (2 m), USB Type-A - USB Type-B cable (2 m), cable cover (EV2456), VESA mounting screw x 4, setup guide	AC power cord (2 m), USB Type-A - USB Type-B cable (2 m), VESA mounting screw x 4, setup guide	AC power cord (2 m), USB Type-A - USB Type-B cable (2 m), VESA mounting screw x 4, setup guide
Others	Others	Others	Others
Warranty ¹	5 Years	5 Years	5 Years
Zero Bright Pixels ²	Yes	Yes	Yes
Dimensions Drawing (Unit: mm)			

¹With current LCD technology, a panel may contain a limited number of missing or flickering pixels. If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximize the life of the monitor, please do not leave the monitor on continuously for more than 6 months from the date of purchase.
² Usage time is limited to 50,000 hours.



Wide

S2133

S1934

S1703-A

S1504

Model Variations	Wide	Square
Panel	EV2430-BK	S1934-HBK
Size	24.1" (61.1 cm)	19" (48.0 cm)
Native Resolution	1920 x 1200 (16:10 aspect ratio)	1280 x 1024 (5:4 aspect ratio)
Viewable Image Size (H x V)	518.4 x 324 mm	374.8 x 293.8 mm
Pixel Pitch / Pixel Density	0.270 x 0.270 mm / 94 ppi	0.253 x 0.253 mm / 97 ppi
Display Colors	16.77 million	16.77 million
Viewing Angles (H / V, typ.)	178° / 178°	178° / 178°
Brightness (typ.)	350 cd/m ²	420 cd/m ²
Contrast Ratio (Typ.)	1000:1	1000:1
Response Time (Typ.)	5 ms (gray-to-gray)	5 ms (gray-to-gray)
Input Terminals	DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4), D-Sub mini 15 pin	DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4), D-Sub mini 15 pin
Output Terminals	DisplayPort, 31 - 76 kHz / 59 - 61 Hz	DisplayPort, 31 - 64 kHz / 59 - 61 Hz
Digital Scanning Frequency (H / V)	59 - 61 Hz / 59 - 61 Hz	31 - 64 kHz / 59 - 61 Hz
Analog Scanning Frequency (H / V)	59 - 61 Hz	31 - 64 kHz / 59 - 61 Hz
USB	USB 2.0: Type-B USB 2.0: Type-A x 2	Separate USB 2.0: Type-B USB 2.0: Type-A x 2
Audio	Headphones (Stereo mini jack)	Headphones (Stereo mini jack)
Power	Power Input: AC 100 - 240 V, 50 / 60 Hz Typical Power Consumption: 37 W Maximum Power Consumption: 0.5 W or less	Power Input: AC 100 - 240 V, 50 / 60 Hz Typical Power Consumption: 37 W Maximum Power Consumption: 0.5 W or less
Features & Functions	Power Save Mode Presets Modes Automatic Brightness Control Dimensions (Landscape, W x H x D)	Power Save Mode Presets Modes Automatic Brightness Control Dimensions (Landscape, W x H x D)
Physical Specifications	611.7 x 376.3 - 545.3 x 230 mm	405 x 406.5 - 506.5 x 205 mm
Dimensions (Without Stand, W x H x D)	611.7 x 364.4 x 53.7 mm	367 x 304 x 59 mm
Net Weight	8.5 kg	4.7 kg
Net Weight (Without Stand)	5.7 kg	3.4 kg
Height Adjustment Range	169 mm	100 mm
Tilt / Swivel	35° Up, 5° Down / 344°	30° Up, 0° Down / 35° Right, 35° Left
Pivot	90° (both clockwise and counter clockwise)	90° (clockwise)
Hole Spacing (VESA Standard)	100 x 100 mm	100 x 100 mm
Certifications & Standards	TCO Certified Generation 9, EPEAT 2018 (US), TÜV/Ergonomics, TÜV/low blue light content, TÜV/ Flicker Free, TÜV/ Eye Care, FCC-B, CAN ICES-3 (B), TU/VAS, FCC-B, CAN ICES-3 (B), TU/VAS, PSE, VCCI-B, EPA ENERGY STAR, RoHS, WEEE, China RoHS, CCC, EAC	TCO Certified Generation 8, TÜV/Ergonomics, TÜV/low blue light content, TÜV/ Flicker Free, TÜV/ Eye Care, FCC-B, CAN ICES-3 (B), TU/VAS, FCC-B, CAN ICES-3 (B), TU/VAS, PSE, VCCI-B, EPA ENERGY STAR, RoHS, WEEE, China RoHS, CCC, EAC
Dedicated Software	Supported	Supported
Supplied Accessories	DisplayPort (2 m)	DisplayPort (2 m)
Cables	AC power cord (2 m), USB Type-A - USB Type-B cable (2 m), cable cover (EV2430-F), VESA mounting screw x 4, setup guide	AC power cord (2 m), audio cable (2.1 m), VESA mounting screw x 4, setup guide
Others	Others	Others
Warranty ¹	5 Years	5 Years
Zero Bright Pixels ²	Yes	Yes
Dimensions Drawing (Unit: mm)		

¹With current LCD technology, a panel may contain a limited number of missing or flickering pixels. If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximize the life of the monitor, please do not leave the monitor on continuously for more than 6 months from the date of purchase.
² Usage time is limited to 50,000 hours.

 UniKomp.pl

Nowe Technologie IT

ul. Dworcowa 8
43-200 Pszczyna
sklep@unikomp.pl
www.wyswietlanie.pl

Telefony
(32) 210 22 11
(32) 326 33 00
(32) 212 88 22

