



VS-211X 2x1 4K HDR HDMI Auto Switcher

| HDMI



VS-211X is a high-performance 2x1 automatic switcher for 4K HDR, HDMI video signals. Offering priority and last-connected switching options, it automatically switches according to the selected switching scheme based on active video signal detection

FEATURES

Plug & Play Auto Switcher - Automatically plays the switched source signal on the connected display according to user-configured preferences, such as priority or last-connected input. When the user manually switches, by pressing a button, the auto switching is overridden

HDMI Signal Switching - HDCP 2.3 compliant, Supporting deep color, x.v.Color™, CEC, lip sync, HDMI uncompressed audio channels, Dolby TrueHD, DTS-HD, 2K, 4K, and 3D as specified in HDMI 2.0

Multi-channel Audio Switching - Up to 32 channels of digital stereo uncompressed signals for supporting studio-grade surround sound

I-EDIDPro™ Kramer Intelligent EDID Processing™ - Intelligent EDID handling, processing, locking and pass-through algorithm ensures plug & play operation for HDMI source and display systems

Audio De-embedding - The digital audio signal passing-through to the HDMI output, is de-embedded, converted to an analog signal and sent to the stereo unbalanced analog audio output. This enables playing the audio on locally connected speakers, in parallel to playing it on the speakers connected to the AV acceptor device (such as TVs with speakers)

Simple Switching Operation - Local buttons or remotely connected contact-closure buttons for flexible user input selection and switching control

Cost-Effective Maintenance - Status LED indicators for HDMI ports facilitate easy local maintenance and troubleshooting. Local firmware upgrade ensures lasting, field-proven deployment

Easy Installation - Compact DigiTOOLS® fan-less enclosure for user-reachable table mounting, or side-by-side mounting of 3 units in a 1U rack space with the recommended rack adapter




kramer

TECHNICAL SPECIFICATIONS

| | |
|--------------------------|---|
| Inputs | 2 HDMI: On a female HDMI connector |
| Outputs | 1 HDMI: On a female HDMI connector 1 Unbalanced Stereo Audio: On a 3.5mm mini jack |
| Ports | Remote Contact Closure: On a 3-pin terminal block connector |
| Video | Max Data Rate: 17.82GBPS (5.94Gbps per graphic channel) Max Resolution: 4K@60 (4:4:4) Compliance: HDR10 as specified in HDMI 2.0, HDCP 2.2 |
| Power | Source: 5V DC, 2A Consumption: 500mA |
| User Interface | Controls: Input selection buttons. DIP-switches for configuring switching mode and EDID mode |
| Enclosure | Size: DigiTOOLS® Type: Aluminum Cooling: Convection ventilation |
| Environmental Conditions | Operating Temperature: 0° to +40°C (32° to 104°F) Storage Temperature: -40° to +70°C (-40° to 158°F) Humidity: 10% to 90%, RHL non-condensing |
| REGULATORY | Health, Safety, Environmental: RoHs, WEEE, CE |
| Product Dimensions | 12.00cm x 7.15cm x 2.44cm (4.72" x 2.81" x 0.96") W, D, H |
| Product Weight | 0.2kg (0.5lbs) approx |
| Shipping Dimensions | 49.00cm x 18.60cm x 58.80cm (19.29" x 7.32" x 23.15") W, D, H |
| Shipping Weight | 0.7kg (1.5lbs) approx |



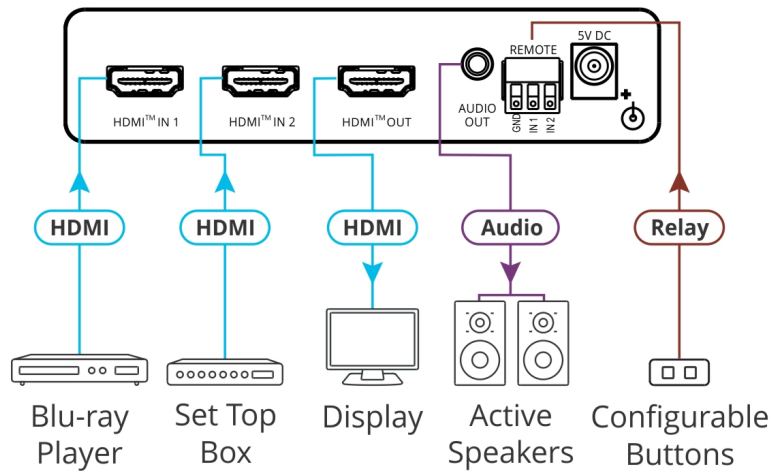

ul. Dworcowa 8, 43-200 Pszczyna
 +48 (32) 210 22 11, +48 609 610 393
 sklep@unikomp.pl | www.wyswietlanie.pl