


# Eonis Color 8MP (MDRC-8132)\*

32" clinical display for viewing of medical images and clinical information

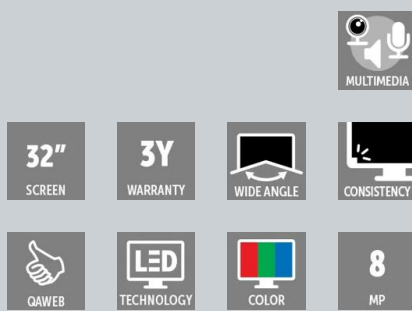

- 32" display for viewing medical records
- 8MP screen resolution
- Front sensor for consistent image representation
- Remote QA management tools
- Integrated multimedia functionalities
- Pathology setting for accurate representation of whole slide images

Eonis 8MP is a 32" display built with healthcare specialists in mind. It combines consistent, high image quality and an attractive, versatile design with centralized quality assurance. It also includes built-in multimedia functionalities for easy virtual collaboration.

### High image quality

Eonis 8MP offers you 8 megapixels of screen resolution, the highest in our Eonis range. This makes it an ideal choice for healthcare professionals seeking second opinions, emergency or trauma assessments, or referrals, which are not primary diagnoses. Moreover, the display incorporates an innovative front consistency sensor that seamlessly adjusts image quality whenever you power it on. SteadyColor technology guarantees consistent and accurate colors.

Additionally, Eonis 8MP has a pathology setting that triggers sRGB color calibration, resulting in excellent images with accurate color representation.

### Virtual collaboration was never this easy

The Eonis 8MP extends its capabilities beyond its core functions by providing multimedia features. These streamline intra-hospital and virtual communication among healthcare practitioners, discussing a patient's medical history, electronic medical records and clinical images.

- Built-in camera, microphone, and speakers
- Consistent images and centralized quality assurance
- KVM for seamless switching between workstations

These features promote effective communication across locations and clinical disciplines, making Eonis 8MP an excellent tool for teleconsultations with



patients as well.

### **Centralized quality assurance**

Eonis monitors are bundled with Barco's cloud-based QAWeb Enterprise software, an online platform for automated calibration, quality assurance, and asset management. Praised in hospitals around the world, QAWeb Enterprise allows healthcare IT and PACS administrators to centrally and remotely manage image quality across the healthcare organization, at the touch of a button.

Please consult your Barco representative or distributor in your country or territory to confirm availability. A reference to any product or service on this site does not imply that such product is or will be available in your location.

\* This product is presently not authorized for commercial distribution. It's awaiting CE marking in Europe but also product registration in several other countries worldwide. For additional information, please get in touch with your Barco representative.

**Product specifications****EONIS COLOR 8MP (MDRC-8132)\***

General specifications	
Screen technology	IPS
Active screen size (diagonal)	812.80 mm (32.0")
Active screen size (H x V)	708.48 x 398.52 mm (27.9 x 15.7")
Aspect ratio (H:V)	16:9
Resolution	8MP (3840 x 2160 pixels @ 60 Hz)
Pixel pitch	0.1845mm
Color imaging	Yes
Gray imaging	Yes
Bit depth	30 Bit
Viewing angle (H, V)	170°
Pathology Setting	Yes
RapidFrame	Yes
Ambient light presets	Yes, reading room selection
Front sensor	Yes, Front Consistency Sensor
Maximum luminance (panel typical)	500 cd/m <sup>2</sup>
DICOM calibrated luminance	300 cd/m <sup>2</sup>
Contrast ratio (panel typical)	1000:1
Response time ((Tr + Tf)/2) (typical)	9.8 ms
Housing color	Black (RAL 9004) / White (RAL 9003)
Video input signals	2x DisplayPort
Video output signals	1x DisplayPort (MST)
USB ports	2x USB-B 2.0 upstream (endpoint) 5x USB-A 2.0 downstream (of which 1 charge port)
KVM switch	Yes
Power rating	24 Vdc, 8.3 A
Power requirements	This device shall only be powered by the medical approved power supply of Adapter Tech., type ATM200T-P240: <ul style="list-style-type: none"> <li>■ Input: 100-240 Vac, 50-60 Hz, 2.5-0.9 A</li> <li>■ Output: 24 Vdc, 8.3 A</li> </ul>
Power consumption	45.5 W (nominal) < 0.35 W (hibernate) < 0.35 W (switched off)
Dimensions with stand (W x H x D)	743 x 518~618 x 238 mm
Dimensions w/o stand (W x H x D)	743 x 459 x 63 mm
Dimensions packaged (W x H x D)	900 x 750 x 365 mm
Net weight with stand	13 kg
Net weight w/o stand	8.4 kg
Net weight packaged	21 kg (without optional accessories)
Tilt	-5° to +25°
Swivel	-30° to +30°
Pivot	N/A
Height adjustment range	100 mm

**Product specifications****EONIS COLOR 8MP (MDRC-8132)\***

Mounting standard	VESA (100 mm)
Screen protection	N/A
Recommended modalities	All digital images, except digital mammography.
Certifications	ALL PENDING CE (Medical Device) FDA Class I, 510(k) exempt CCC (China), KC (Korea), INMETRO (Brazil), BIS (India), EAC (Russia), UKCA (UK) Safety specific: IEC 60950-1:2005 + A1:2009 + A2:2013 EN 60950-1:2006 + A1:2010 + A11:2009 + A2:2013 IEC 62368-1:2018 EN IEC 62368-1:2020 + A11:2020 IEC 60601-1:2005 + A1:2012 + A2:2020 EN 60601-1:2006 + A1:2013 + A12:2014 + A2:2021 ANSI/AAMI ES 60601-1:2005 + A1:2012 + A2:2021 CAN/CSA C22.2 No. 60601-1:2014 + A2:2022 EMI specific: IEC 60601-1-2:2020 (ed4.1) EN 60601-1-2:2015 + A1:2021 (ed4.1) FCC part 15 Class B ICES-001 Level B VCCI (Japan) Environmental: China Energy Label, EU RoHS, China RoHS, REACH, Canada Health, WEEE, Packaging Directive
Supplied accessories	User Guide Quick Install Sheet Documentation disc System sheet Video cables Mains cables USB cable External power supply
Optional accessories	Display controller Touch pad
QA software	QAWeb Enterprise
Warranty	3 years
Operating temperature	0 °C to 35 °C (20 °C to 30 °C within specs)
Storage temperature	-20 °C to +60 °C
Operating humidity	8 % to 80 % (non-condensing)
Storage humidity	5 % to 85 % (non-condensing)
Operating pressure	70 kPa
Storage pressure	50 to 106 kPa



UniKomp.pl  
Nowe Technologie IT

ul. Dworcowa 8	Telefony
43-200 Pszczyna	(32) 210 22 11
sklep@unikomp.pl	(32) 326 33 00
www.wyswietlanie.pl	(32) 212 88 22

**Last updated: 12 Feb 2024**

© 2018 Barco nv. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Due to continued innovation, information and technical specifications are subject to change without prior notice. Please check [www.barco.com](http://www.barco.com) for the latest specifications.