


Eonis 21" (MDRC-2421)

21" clinical display for hospital-wide viewing of clinical data and images

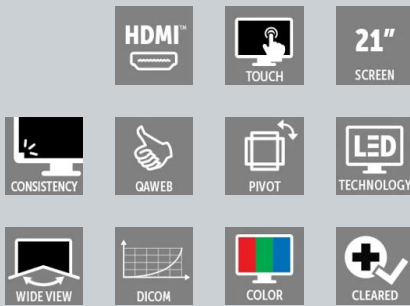

- 21" display for reviewing clinical images
- Front sensor for consistent images
- Automated calibration & QA

The Eonis 21" brings reliable, DICOM compliant images to a broad palette of imaging applications, including EMR. It combines consistent image quality and an attractive, versatile design with effortless quality assurance.

Easy collaboration with consistent images

Eonis presents sharp, bright images. The display's unique front consistency sensor automatically aligns the image quality every time the display is switched on. The Eonis 21" can be used for consulting radiology and PACS images, as well as clinical review and consultation.

Result? Consistent images that make collaboration between specialists easier. Discuss images with colleagues at multiple locations, knowing that everyone is seeing identical images.

Automated quality assurance

Eonis 21" comes with the cloud-based QAWeb Enterprise software, an online service for automated calibration, quality assurance and asset management.

Praised in hospitals around the world, QAWeb Enterprise allows healthcare IT and PACS administrators to centrally and remotely manage image quality across the healthcare organization, at the click of a button.

Fit for clinical review

Barco's Eonis display features multiple mounting and interface options, including a VESA mount. The user-friendly height, tilt and pivot adjustments of the base allow the monitor to be positioned for maximum comfort.

Like every Barco clinical review display, the Eonis 21" complies with



Like every Barco clinical review display, the Eonis 21" complies with international medical and patient safety standards.

Variants

- MDRC-2421 (Option SNIB): standard brightness, no cover, no touchscreen, internal power supply, black housing

A ecolabel for Eonis 21" The Eonis 21" has been subjected to Barco's ecoscoring protocol and has received an A rating. Some key factors that contributed to this rating are:

- Energy efficient when in active use
- Automatic standby mode when device is not in use
- 100% halogen-free PCBs, cables and plastics
- Packaging optimized for a standard pallet & for sea freight
- Less than 3 tools needed for disassembly & PCBAs are not potted

Product specifications

EONIS 21" (MDRC-2421)

General specifications

Screen technology	IPS TFT
Active screen size (diagonal)	541.0 mm (21.3")
Active screen size (H x V)	432.0 mm x 324.0 mm (17.0" x 12.8")
Aspect ratio (H:V)	4:3
Resolution	2MP (1600 x 1200 pixels)
Pixel pitch	0.270 mm
Color imaging	Yes
Gray imaging	Yes
Bit depth	24 bit
Viewing angle (H, V)	178°
Color Calibration(sRGB)	Yes, reading room selection
Front sensor (FLOS)	Yes, Front Consistency Sensor
Maximum luminance (panel typical)	500 cd/m ²
DICOM calibrated luminance	250 cd/m ²
Contrast ratio (panel typical)	1800:1
Response time ((Tr + Tff)/2) (typical)	8 ms
Housing color	RAL 9004
Video input signals	1x DVI-I 1x DisplayPort 1x HDMI™
USB ports	1x USB 2.0 upstream (endpoint) 2x USB 2.0 downstream
Power consumption	< 25 W < 0.3 W (hibernate) < 0.3 W (switched off)
Dimensions with stand (W x H x D)	Portrait: 374.5 x 506.6-583.3 x 201.3 mm Landscape: 477.0 x 411.5-529.6 x 201.3 mm
Dimensions w/o stand (W x H x D)	Portrait: 477.0 x 374.5 x 70.4 mm Landscape: 374.5 x 477.0 x 70.4 mm
Dimensions packaged (W x H x D)	195 x 488 x 527 mm
Net weight with stand	6.2 kg
Net weight without stand	4.1 kg
Net weight packaged	10 kg
Tilt	-5° to +22°
Pivot	90°
Height adjustment range	110 mm
Mounting standard	VESA (100 mm)
Recommended modalities	All digital images, except digital mammography.
Certifications	FDA Class I, 510(K) exempt CE (Medical Device Class I) UKCA (UK) CCC (China) KC(Korea) VCC(Japan) BIS (India) UL (US and Canada), FCC, DEMKO Safety specific: IEC 60601-1:2005 + AMD1:2012+ AMD2:2020 EN 60601-1:2006 + A1:2013 + A12:2014 + A2:2021 IEC 62368-1:2018 EN 62368-1:2020 + A11:2020 IEC 60601-1-6:2010 + AMD1:2013 + AMD2:2020 ANSI/AAMI ES60601-1:2005 + R1:2012 + R2:2021 CAN/CSA C22.2 No. 60601-1:2014 GB 4943.1-2022 EMC specific: IEC 60601-1-2:2014 + A1:2020 EN 60601-1-2:2015 + A1:2021 FCC Part 15 Subpart B ICES-003 Level B GB 17625.1-2022 GB/T 9254.1-2021 Environmental: China Energy Label, EU RoHS, China RoHS, REACH, Canada Health, WEEE, Packaging Directive
Supplied accessories	1x DisplayPort video cable 1x USB cable 1x Printed user guide (in English, other languages can be found on the documentation disc) 1x Documentation disc 1x System sheet Mains cables (based on ordered part number)
QA software	QAWeb
Warranty	3 years
Operating temperature	0°C to +40°C
Storage temperature	-20°C to +60°C
Operating humidity	20% to 90% (non-condensing)
Storage humidity	10% to 90% (non-condensing)
Storage pressure	50 to 106 kPa



unikomp.
Nowe Technologie IT

ul. Dworcowa 8, 43-200 Pszczyna
+48 (32) 210 22 11, +48 609 610 393
sklep@unikomp.pl | www.wyswietlanie.pl

Last updated: 22 Oct 2024

© 2024 Barco nv. All rights reserved. Reproduction in whole or in part without written permission is prohibited. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Due to continued innovation, information and technical specifications are subject to change without prior notice. Please check www.barco.com for the latest specifications.